



REThERM RRD081E

Combined regeneration oven to reheat refrigerated food (+3°C)

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seal, made up of food-grade and high-heat resistant silicone
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Ventilated cooling provided by stainless steel evaporator
- Ecological compressor units (R452A)
- Snap-shut door
- Mounted on four 125mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

STANDARD SUPPLY

- Removable GN 1/1 tray racks
- Speedgrade fan speed reduction system

OPTIONS & ACCESSORIES

- Single-point core probe
- Automatic humidity vent (Climachef)
- USB port saving device HACCP
- Multipoint core probe
- Needle core probe, thin
- Glass door and lighting
- Opposite side opening
- One Touch software
- Side racks 600x400
- Grids
- Trays

FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding
- Simplified, user-friendly control
- Operating temperature: 0°C - 160°C
- Manual humidity vent
- Periodic reversal of direction of rotation of the fans for better cold/hot air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



moduline

TECHNICAL INSTALLATION DIAGRAM

Electricity supply
cable inlet



Adjustable
humidity vent




Chamber drain
and condensation
drain tray



Softened
water tank



Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories
or options.

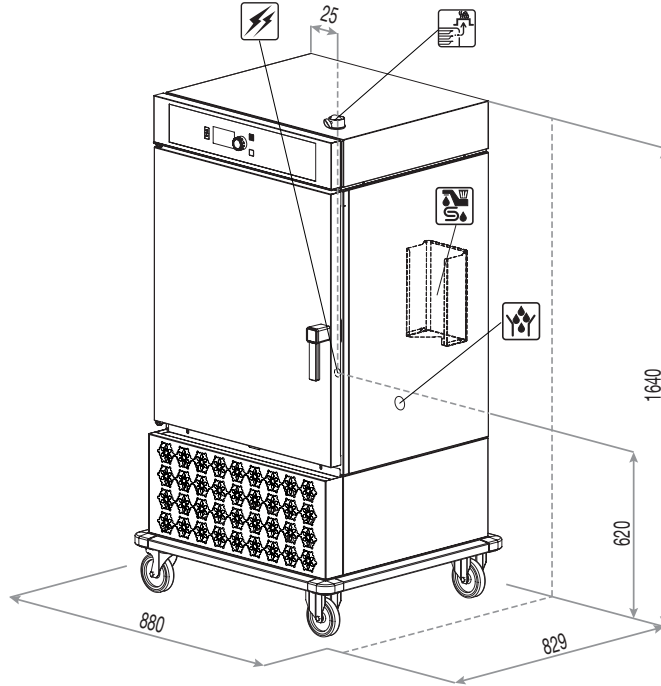

Overall dimensions
(W x D x H) - mm

880 x 829 x 1640h

Trays capacity

8 x GN 1/1
or 600 x 400

Distance
[mm]

96

Plates capacity
(tray racks GN1/1)

16 ø 200 - 260
8 ø 270 - 320

Power supply

380-415V 3N 50Hz

**Working
temperature [°C]**

0 ÷ 160

**Product max
capacity [Kg]**

29

**Total input
[kW]**


6,8 (400V)

**Amps.
[A]**

9,9 (400V)

**Net weight
[Kg]**

159

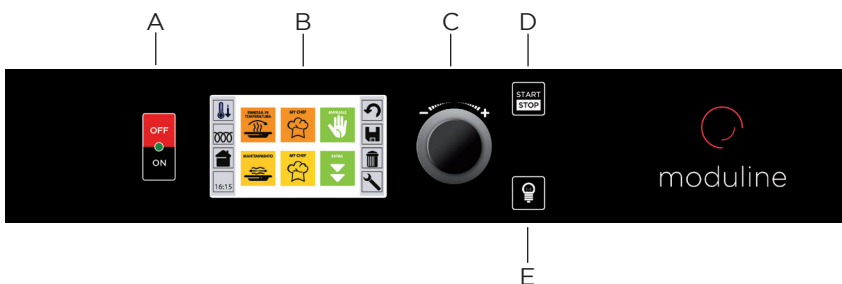

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob
and select "ENTER"
- D "START/STOP" button
- E Chamber light button

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it